


EXPAFOL

RACING CARBON (Mate)

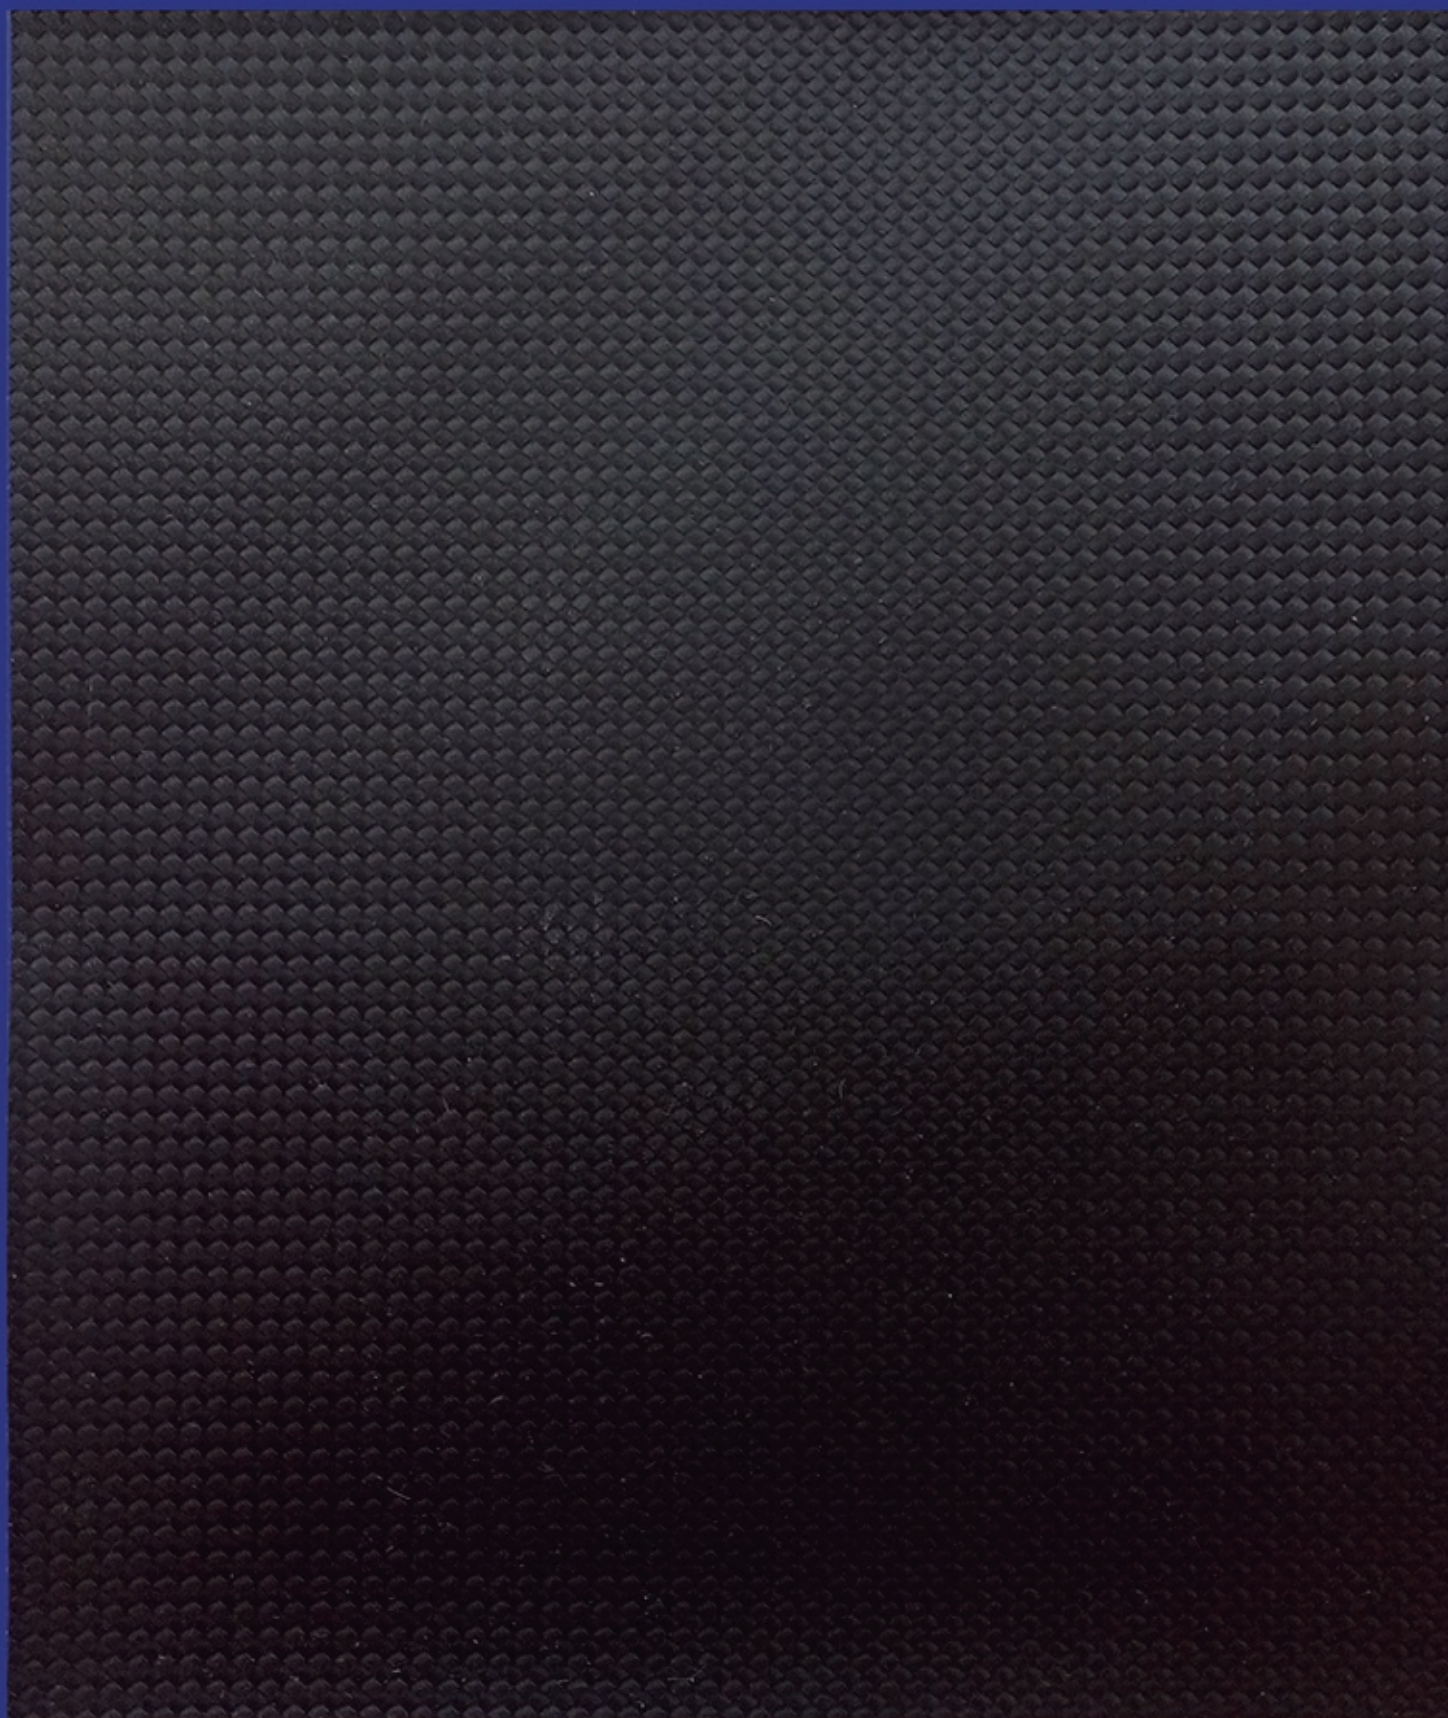

C/ Leonard Torres Quevedo, 14
Pol. Ind. Coll de la Manyà
08403 - GRANOLLERS (Barcelona · Spain)
Tel. +34 93 731 59 05 · info@expafol.com

www.expafol.com

RACING CARBON (Mate)

Características <i>Characteristics</i>	Unidad <i>Unit</i>	Valor <i>Value</i>	Norma <i>Test method</i>
Composición <i>Composition</i>	Vinilo/Vinyl Uretano/Urethane Soporte/Backing: 100% Poliéster/Polyester		
Peso <i>Weight</i>	gr/m2	565 ± 5%	ISO 2286-2
Espesor <i>Thickness</i>	mm	0.90 ± 5%	ISO 2286-3
Ancho bobina <i>Width roll</i>	cm	140	
Metros bobina <i>Roll meters</i>	m	40	
Resistencia al desgarro <i>Tensile strenght</i>	N	Transversal/Across >20	ISO 4674-1
		Longitudinal/Along >30	
Resistencia a la tracción <i>Tensile strenght</i>	N	Transversal/Across >300	ISO 1421
		Longitudinal/Along >300	
Alargamiento a la rotura <i>Elongation at break</i>	%	Transversal/Across 105±20%	ISO 1421
		Longitudinal/Along 80±20%	
Adhesion <i>Adhesion</i>	N	>40	ISO 2411
Resistencia a la abrasión <i>Abrasion resistance</i>	RUB	>22.000 (12Kpa)	ISO 5470-2
Solidez del color al frote <i>Color fastness to rubbing</i>	GS	Seco/Dry >4	ISO 105X12
		Mojado/Wet >4	
Resistencia a la luz <i>Resistencia a la luz</i>	BW	Colores claros/Ligth colors >5	ISO 105B02
		Colores oscuros/Dark colors >6	
Normativa Reach <i>Reach Norm</i>		OK	

Normas de limpieza: Limpiar con un trapo húmedo y enjabonado. Usar sólo jabón neutro. Enjuagar con agua limpia. No usar disolventes químicos o sprays abrillantadores.

Cleaning rules: Clean with damp soapy cloth and rinse well with clean water. Do not use solvents, bleaches, synthetic detergent, polishes or aerosol spray.

Esta información esta basada en los resultados de experiencias y test , y suministrada como guía.
This information is based on results from experience and tests and given to be used as guideline.

15.08.2025

